




Kt&m
Karmko For Trading And Manufacturing








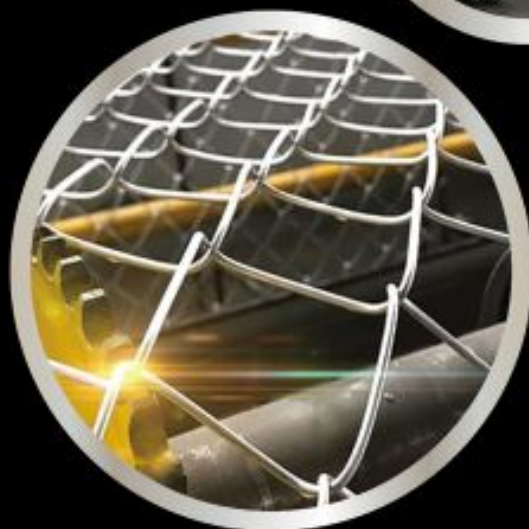






3D PANEL FENCE

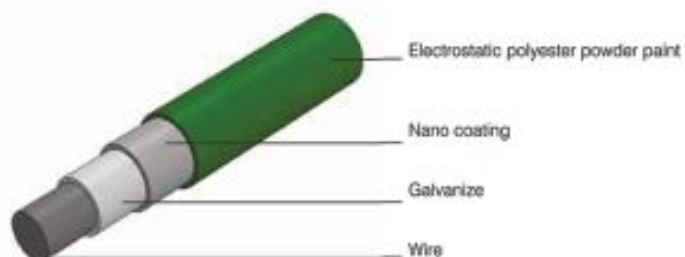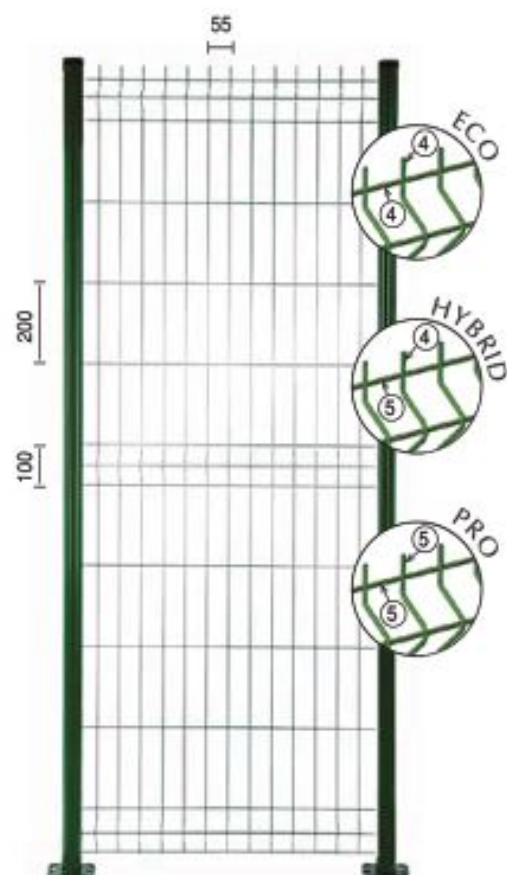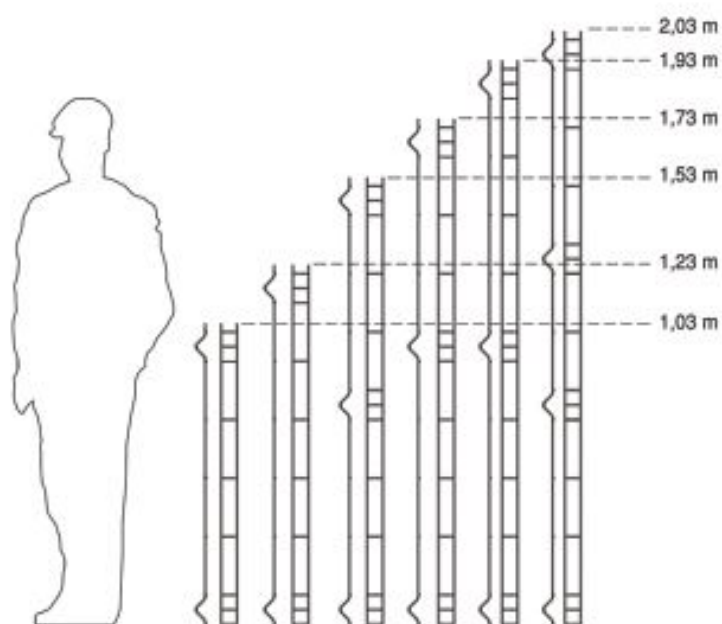

Wire	Ø 4,00*4,00 / Ø 4,50*4,50 mm Ø 4,00*5,00 / Ø 5,00*5,00 mm
Mesh Size	55 mm 150 / 200 mm
Height	1030 / 1230 / 1530 1730 / 1930 / 2030 mm
Length	2000 / 2500 / 3000 mm

RECT POST

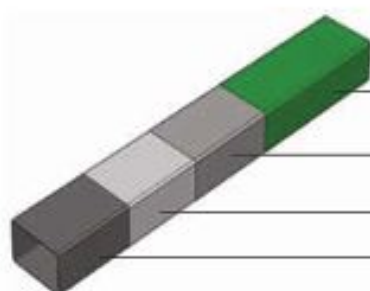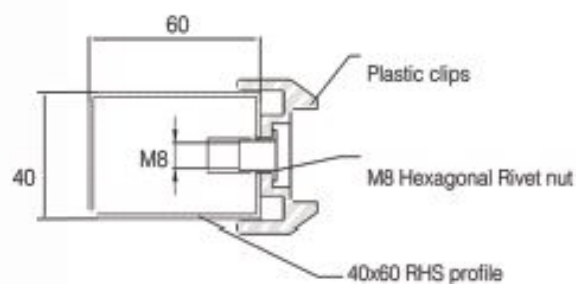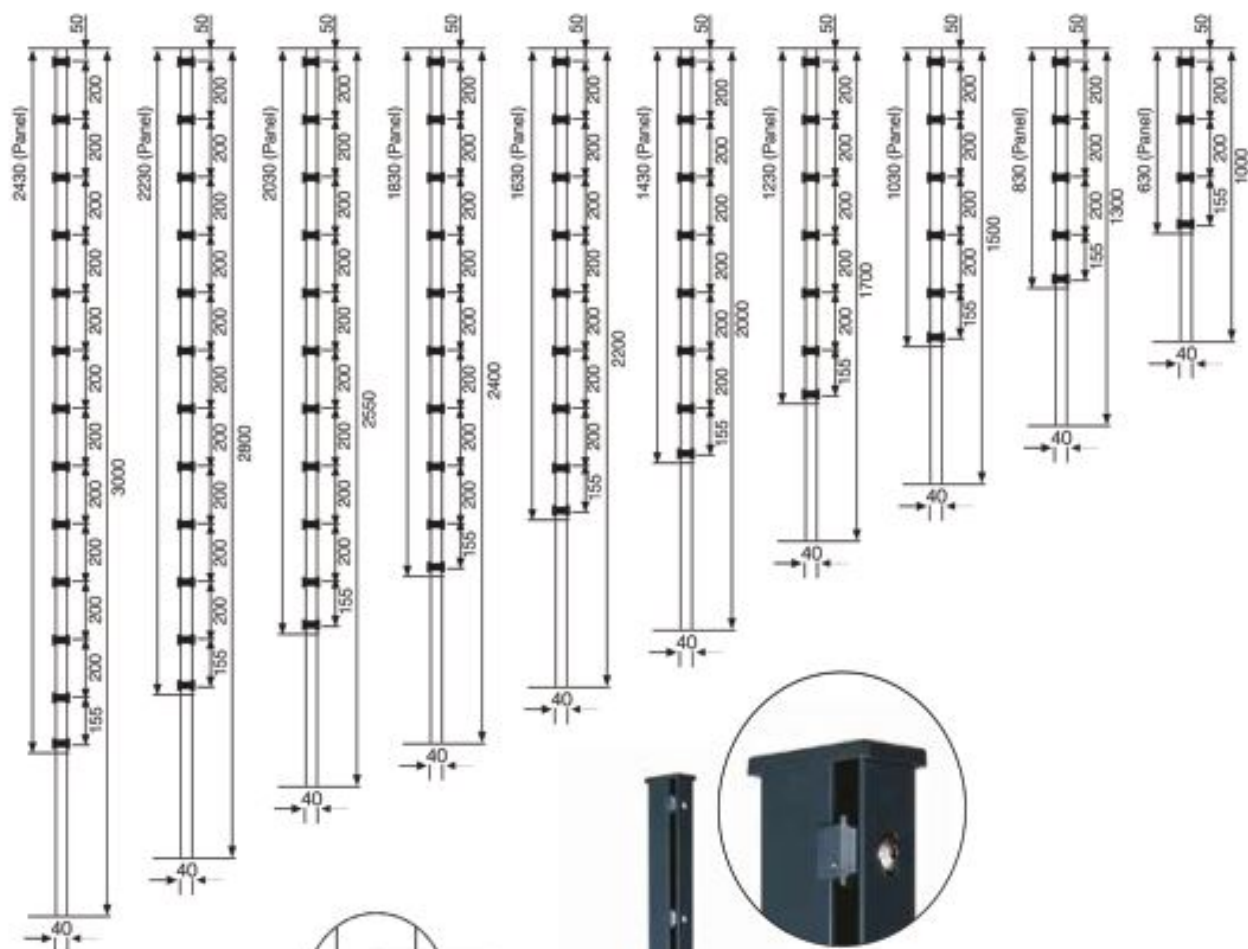

Electrostatic polyester powder paint



Nano coating

Galvanize

- Mental

Profile	40 x 60 x 1,5 mm 40 x 60 x 2,0 mm
Profile Height	1000 / 1300 / 1500 / 1700 / 2000 2200 / 2400 / 2550 / 2800 / 3000 mm
Flatbar	40 x 4 mm
Flatbar Height	630 / 830 / 1030 / 1230 / 1430 1630 / 1830 / 2030 / 2230 / 2430 mm

DECORAGRASS

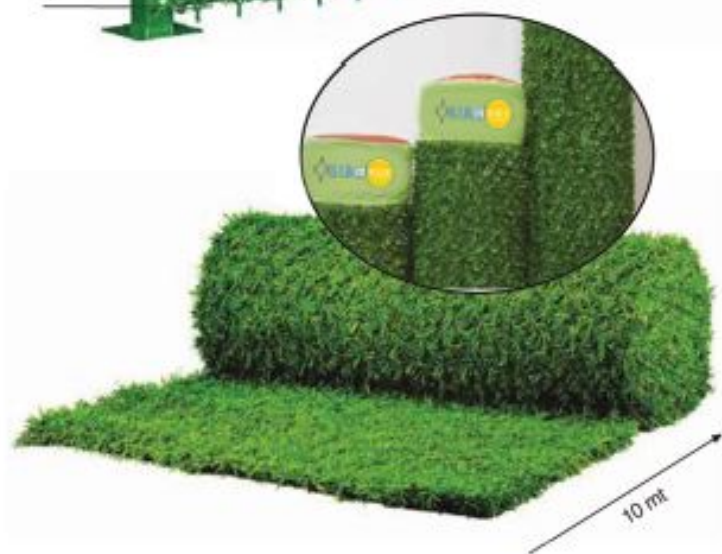
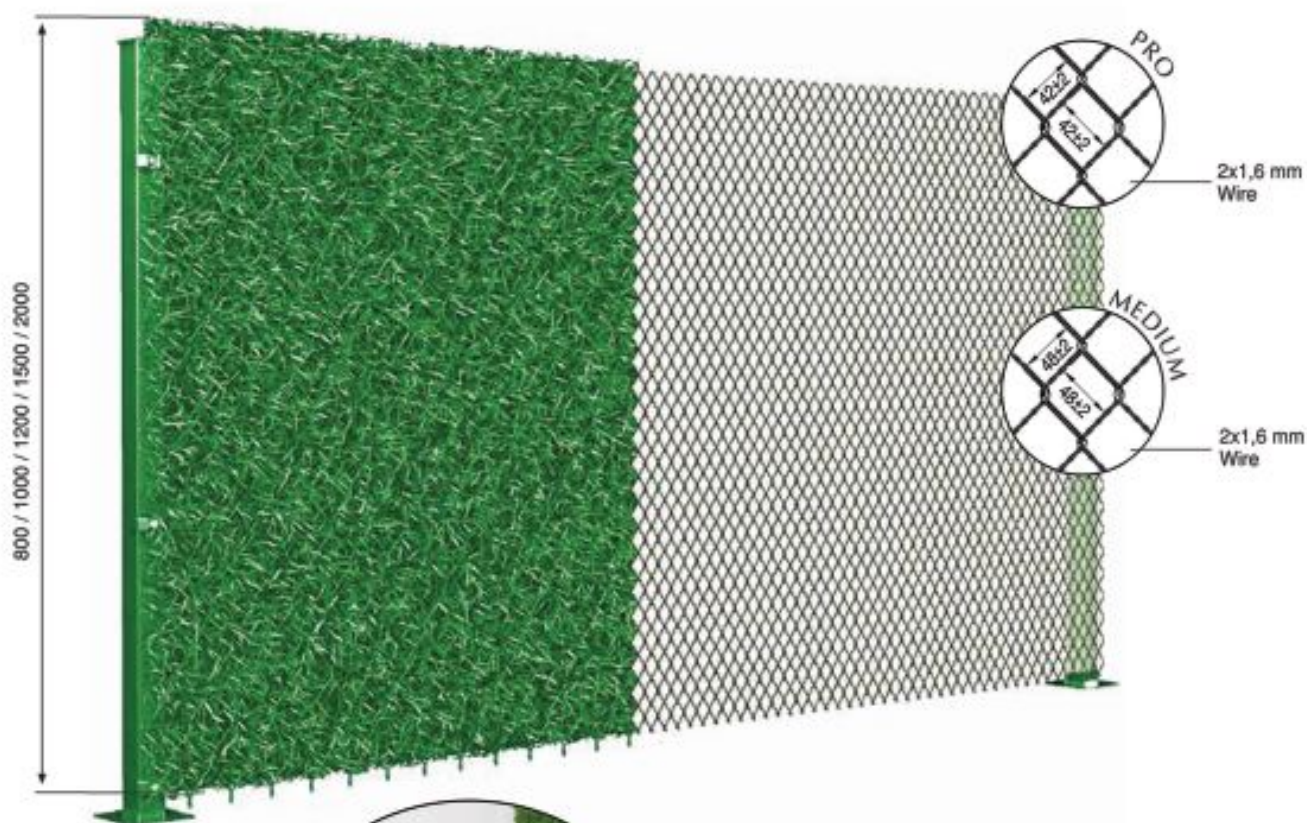


	Pro	Medium
Mesh Size	42 ± 2	48 ± 2
Wire d.ø	2 x Ø 1,60 mm	2 x Ø 1,60 mm
Height	1000 / 1200 / 1500 / 2000 mm	1000 / 1200 / 1500 / 2000 mm
Roll Length	10 m	10 m

DECO POST



CHAINLINK

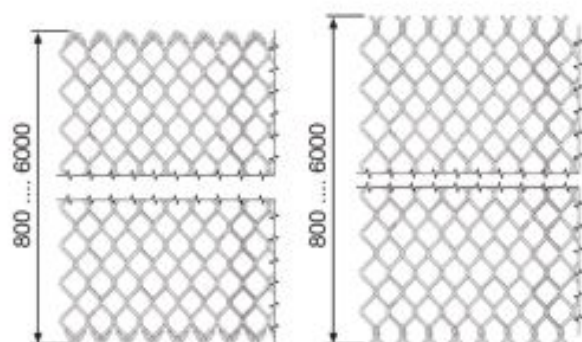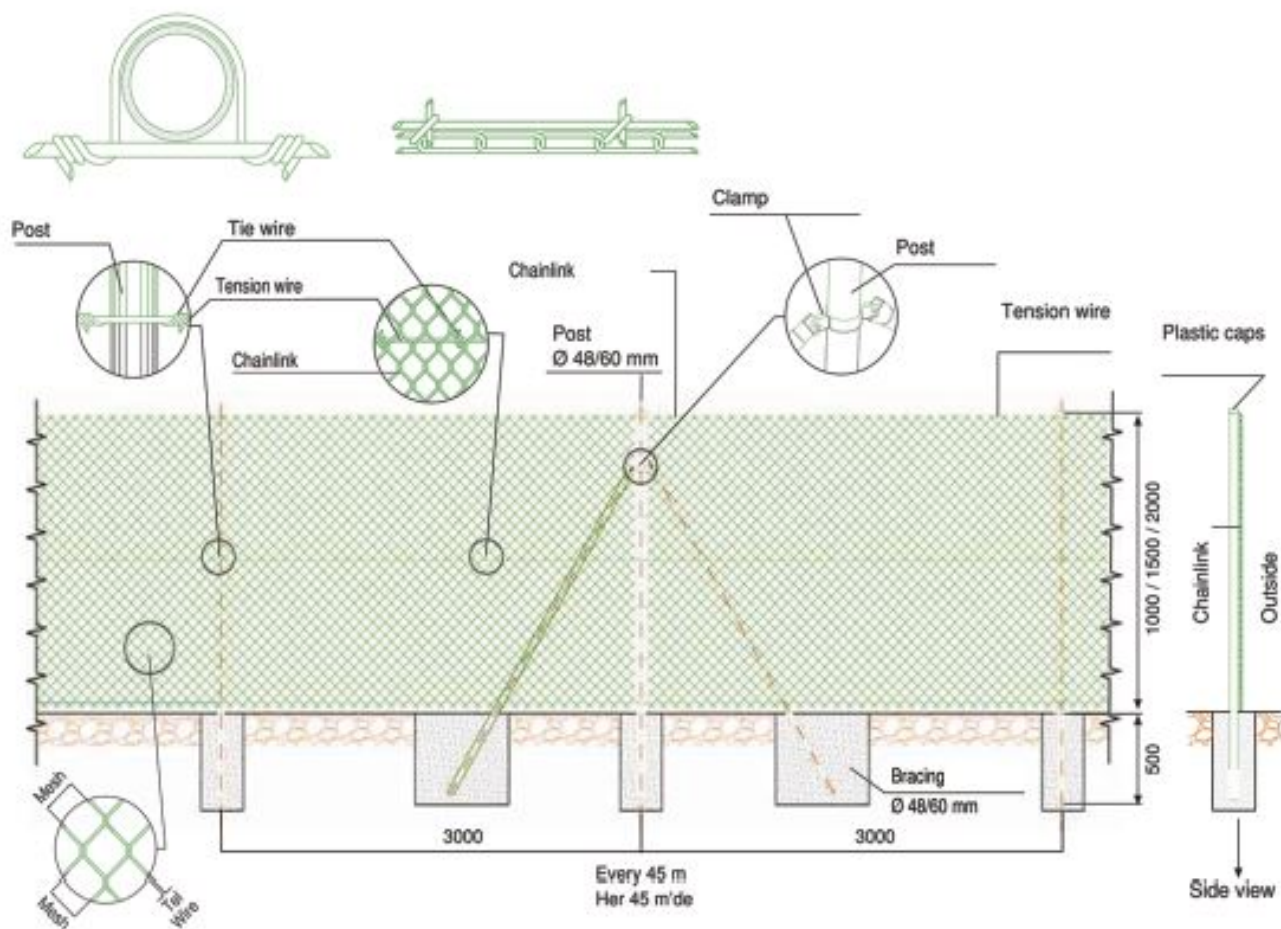

	Galvanized	PVC Coated
Mesh Size	30x30 / 40x40 / 50x50 60x60 / 70x70 (+/- 4)	30x30 / 40x40 / 50x50 60x60 / 70x70 (+/- 1)
Wire dia.	Ø 2 4 mm	Ø 3 4,80 mm
Height	800 6000 mm	800 6000 mm
Roll Length	Max 20 m	Max 20 m



Galvanized and PVC Coated Wires

Raw Materials	Covering	Quality
SAE1006, 1008, 1010, 1018, 1045, 1076, 1082, Çinko (%99,995 Zinc Ingots acc: EN 1179 Z1)	EN 10244-2 Sınıf A, AB, B, C, ve D	EN 10244-2 ASTM A641A ve Diğer Uluslararası Normlar

Resistance

Strength Types	Diameter	Strength Ranges
Hard	Ø 1,40 mm - Ø 6,00 mm	950 - 1860 Nmm ²



CONCERTINA RAZOR WIRE



BTO 12



BTO 22



BTO 28

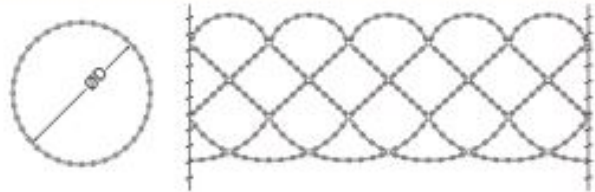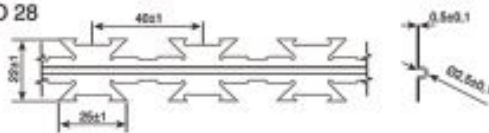

Wire	Ø 2,50 mm
Material	Galvanized Steel wire - 1600 N/mm ² / 100 / 275 gr/m ² Galvanizli Çelik tel - 1600 N/mm ² - 100 / 275 gr/m ²
Sheet metal	0.50 mm - 100 / 275 gr/m ² galvaniz - SS 304 / 430 0.50 mm - 100 / 275 gr/m ² galvaniz - 304 / 430 Kalite paslanmaz
Height	450 / 600 / 900 mm

FLAT WRAP RAZOR WIRE



BTO 12



BTO 22




BTO 28

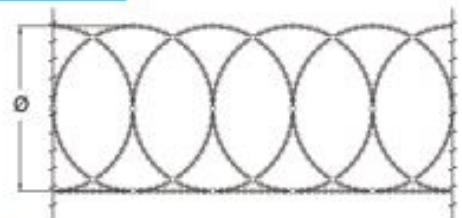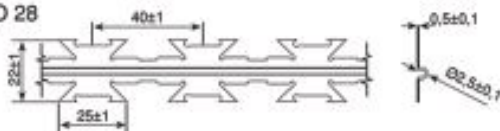

Wire	Ø 2,50 mm
Material	Galvanized Steel wire / 1600 N/mm ² / 100 / 275 gr/m ² Galvanizli Çelik tel - 1600 N/mm ² - 100 / 275 gr/m ²
Sheet metal	0.50 mm - 100 / 275 gr/m ² galvaniz - SS 304 / 430 0.50 mm - 100 / 275 gr/m ² galvaniz - 304 / 430 Kalite paslanmaz
Height	450 / 600 / 900 mm
Loop	22,5 cm (450 mm) / 30 cm (600 mm) / 30 cm (900 mm)

BARBED WIRE

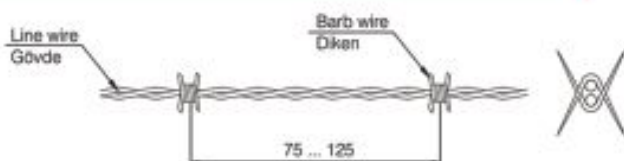

	Metric type Metrik tip		IOWA type Korvansiyonel tip	
	Line wire Gövde	Barb wire Diken	Line wire Gövde	Barb wire Diken
Wire	Ø1,70 mm	Ø1,50 mm	Ø2,50 mm	Ø2,00 mm
Material	Galvanized Steel wire - 100 / 275 gr/m ² Galvanizli Çelik tel - 100 / 275 gr/m ²			

GENERAL DETAILS

Material	Hot Dipped Galvanized
Wire Diameter	1.2 – 2.64 mm
Style	Double Strand, 2-point or 4-point
Barb Length	15 – 30 mm / 0.59" – 1.18"
Barb Spacing	10 cm
Material	Galvanized Steel Wire, PVC Coated Iron Wire in blue, green, yellow and other colors
Process	Twisted
Weight Coil	10kg , 20kg


COLOR SHADES

Light Green, Dark Green







TIP 1

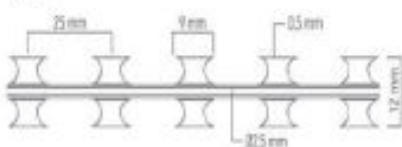


TIP 2

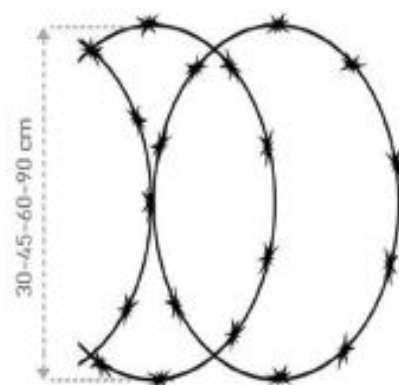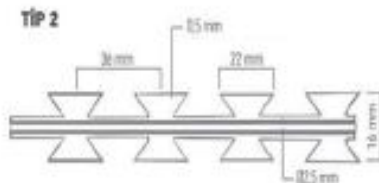



Kt&m

Karmko For Trading And Manufacturing



45-60-90 cm

Size	Shape	Blade thickness	Core wire diameter	Blade length	Blade width	Blade space
BTO-10		0.5 ± 0.05	2.5 ± 0.1	10 ± 1	13 ± 1	26 ± 1
BTO-12		0.5 ± 0.05	2.5 ± 0.1	12 ± 1	15 ± 1	26 ± 1
BTO-18		0.5 ± 0.05	2.5 ± 0.1	18 ± 1	15 ± 1	33 ± 1
BTO-22		0.5 ± 0.05	2.5 ± 0.1	22 ± 1	15 ± 1	34 ± 1
BTO-28		0.5 ± 0.05	2.5	28	15	45 ± 1
BTO-30		0.5 ± 0.05	2.5	30	18	45 ± 1
CBT-60		0.6 ± 0.05	2.5 ± 0.1	60 ± 2	32 ± 1	100 ± 2
CBT-65		0.6 ± 0.05	2.5 ± 0.1	65		





karmko@karmkogroup.com
www.karmkogroup.com



01121101717



01005612410



Kt&m
Karmko For Trading And Manufacturing



Sale Points

7 darb el braberah, el sabtiya st,
corner el komiya school

Qalyoub Slow Road/Mit Halfa/
next to the mill



Store

2 el mustwsaf st, behind
national world trade center
souq el asr



Factory

24 misr alesandria- high street
qalyub-qalyubia-egypt